

**C.O. Operations -
No. 5 Crossbar**

**Construction Project:
Poor Person's Telephone**

Ma Bell's garbage



MAY 1975 Published Monthly VOL 2, NO 5

STAFF

Jack Kranyak
Executive Publishing
Director

John Reynolds
Donald Simmons
Robert Klein
Monti Riemann
TEL Staff Writers

John Reynolds
Circulation Manager

Melanie Howard
Production Manager

CONTENTS


- 3 Trashing The Phone Company— *a look at "Ma Bell's" garbage.*
- 4 Construction Project— *"Poor person's" telephone.*
- 5 Construction Project— *Telephone "Beeper".*
- 7 Central Office Operations— *part two, No. 5 Crossbar.*
- 8 European Report— *Battle with the phone phreaks "hots up".*
- 9 Big Mother Is Watching— *"Ma Bell" has her ear to the wall.*
- 10 Letters
- 14 Little Lexicon
- 17 Touch-Tone song of the month
- 21 Classified Advertising

IMPORTANT:— TEL is published for informational purposes only. Its publication in no way intends any conspiracy on the part of the staff, contributors or publishers to defraud any common carrier or interfere with communications of any form. We neither endorse nor support any actions which might be based upon or drawn from this publication or its contents.

Telephone Electronics Line, TEL and TCA, Trade Marks Registered.

Editorial

By Jack Kranyak



An interesting development awakened us here at TEL recently. On an otherwise quiet Saturday one of our writers called home to let his wife know he would be a little late. To his surprise, the call was answered by an intercept operator, who told him that number had been disconnected at customer's request. You can imagine his shock, especially since he hadn't spoken to the phone company since the day his phone had been installed. A call to the operator verified the intercept operator, but the operator could do nothing and suggested a call to repair service. Repair service declined assistance, since, as they saw it, nothing was broken. They in turn advised that the only possibility was to wait out the weekend and call the business office on Monday to get a reconnect order. After further badgering the repair operator stated flatly that there was "no way in the world" to get the phone back on during the weekend. Our correspondent inquired if Richard Nixon or perhaps Elizabeth Taylor would also find it impossible to get service on a weekend. "Yes" came the reply. After that it only took two supervising operators, the manager at the local service center and five hours to restore service.

A lesser person than our intrepid reporter might have conceded early in the game and spent the weekend without tele-satisfaction, but other than musing about how it might have been, we more or less forgot about it. But not for long! Only one week later the same thing happened to our business lines here at TEL. A little thought and investigation led us to the conclusion that some unhappy reader had found out the name under which our service was listed, and using that name had called in a disconnect order. A call to our business office proved even more interesting. The business representative, remembered taking the disconnect order. She said the caller, who had a noticeable Scottish accent, had identified herself... "Herself"? we asked! "Well, yes" said the business rep "I thought it was a little strange, but she insisted she was Jack Kranyak, so I took her order."

That situation is deplorable, but even worse were the phone company's (in this case Pacific Bell) reasons for not wanting to turn the service back on during a weekend. They argued that there was no way, unless we spoke to the business office, closed of course! They could be sure that the person requesting the reconnect was the subscriber. Their point being that if they turn on your phone when it should be off someone might make an unauthorized long-distance call, a very serious condition in their eyes. As to our contention that it was much worse to leave someone who wanted service without it, they had no reply from their world on the other side of the looking glass.

"So," you ask, "what is the point of all this?" Well, simply to help you protect yourself from the same kind of harassment. After some prodding our business office agreed to the use of a code word to authorize further orders. We could have required that a call be made to our number to verify, but then we wouldn't have been able to call the business office from another location.

TEL suggests that you set up some sort of similar system with your business office. According to the business representative this type of occurrence is not all that rare today. But further, we think that a company which does most of its business vocally should require some identifying code, such as a mother's maiden name. This would be noted when service is first ordered and checked before any information would be given out or an order taken. This is common practice at banks; we think it's time the phone company caught up. □

TEL Phone Company will go to extremes on occasions. In fact, unless you really know what to expect from them they will surprise the heck out of you with their "unpublished tariffs".

Recently, a situation was brought to my attention that up till then I had been totally unaware of, at least to mention, had any concern about. It involved garbage.

The Phone Company will go as far as to prosecute anyone who rumages through their garbage and helps himself to some. Of course they have their reasons for this, and no doubt benefit from such action. But, why should they be so picky about garbage? The answer soon became clear to me: those huge metal bins are filled up with more than waste, old food and refuse...

Although it is Pacific Telephone policy to recycle paper waste products, sometimes employees do overlook this sacred operation when sorting the garbage. Thus top-secret confidential Phone Company records go to the garbage bins instead of to the paper shredders. Since it is constantly being updated with "Company Memorandums" and supplied with extensive reference material, the Phone Company must continually dispose of the outdated materials. Some phone companies are supplied each year with the complete "System Practices" guide. This publication is an over 400 foot long library of reference material about everything to do with telephones. As the new edition arrives each year the old version of "System Practices" must also be thrown out.

I very quickly figured out where some local phone phreaks were getting their material. They crawl into the garbage bins and remove selected items that are of particular interest to them and their fellow phreaks. Such information is copied and distributed to "trusted friends".

One Phone Phreak in the Los Angeles area has salvaged the complete 1972 edition of "Bell System Practices". It is so large and was so out of order (the binders had been removed) that it took him over a year to sort it out and create enough shelving for it in his garage.


Much of this "top secret" information is so secret that most phone companies have no idea what is in their files. They have their hands full simply replacing everything each time a change in wording requires a new revision. It seems they waste more paper than they can read!

It took quite a while for a Hollywood Cal. traffic manager to figure out how all of the local phone phreaks constantly discovered the switchroom test numbers. Whenever someone wanted to use the resboard they found local phone phreaks on the lines talking to points all over the world. It got to the point where the local garbage buffs knew more about the office operations than the employees themselves. One phreak went so far as to call in and tell a switchman what his next daily assignment would be. This, however, proved too powerful. The switchman traced the call and one phone phreak was defined the tool of his trade.

In another rather humorous incident, a fellow phreak was rumaging through the trash bin when he heard someone approaching. He pressed up against the side of the bin and silently waited for the goodies to come. You can imagine his surprise when the garbage from the lunchroom landed on his head.

Most people find evenings best for checking out their local radio trash piles. The only thing necessary is a flashlight and, in the case mentioned above, possibly a rain coat. A word of warning though, before

(Continued on Page 2/1)




POOR PERSON'S PHONE

by A. MILLS

EDITOR'S NOTE: The following article was contributed by a TEL reader. We wish to emphasize that parts for the "Poor Person's Phone" should NOT be removed from any equipment belonging to the telephone company. Local electronic supply stores or large mail order firms (Allied, Radio Shack, etc.) carry a large variety of telephone gear. Further, before connecting your own "Poor Person's Phone" to the telephone lines, be sure to consult your local telephone business office as to relevant regulations in your area.

The telephone described in this article is not very sophisticated, but it does work. And while it is not something you might want in your living room, it is a cheap way to put a phone in the attic or basement, or wherever you might want to answer the phone.


The main part of this phone, and the hardest to make, is the handset (mouthpiece and earpiece). Rather than build this piece yourself it is best to procure it from an outside source. I wouldn't want to suggest that you go out and cut one out of a pay phone, but people have been known to do this. The metal sheathing around most pay phone cords makes that quite difficult nowadays anyway. Handsets are

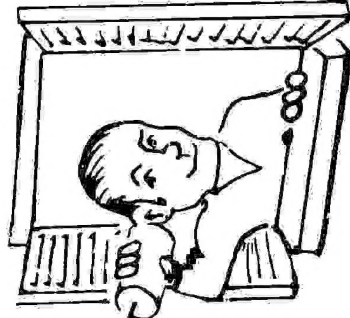

also available, commercially, at much less risk but slightly higher cost.

Having found a handset we move on to the construction of the phone itself. The cord from the handset contains four wires. In the case of the phone mentioned in this article the two wires coming from the earpiece are yellow and black, while those coming from the mouthpiece are green and yellow. In many phones the earpiece wires are red and black, and the mouthpiece wires are both white. First connect the red and yellow wires together, then connect the black and yellow wires to your phone line (see diagram 1). The phone line wires will normally be red and green.

diagram 1

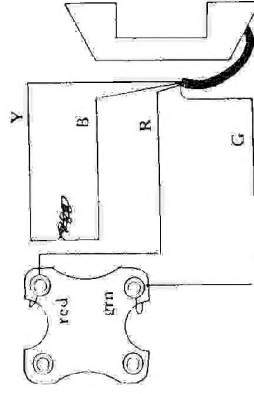

(Continued on Page 13)

by FRED BLECHMAN

Recording telephone conversations has become very commonplace in recent years. This is due, in part, to the introduction of inexpensive battery operated tape recorders, and the availability of simple inductive recording pick-ups. However, in most states the use of this recording in public (i.e. in court, or a radio broadcast) is illegal unless an audible "beep" is heard on the phone every 15 seconds. The purpose is to inform the caller that the call is being recorded. More sophisticated direct coupled recorders usually have a "beep" tone built

in, but providing the tone becomes a problem when using an inductive pick-up device. The "phone beeper" described here serves this purpose conveniently and efficiently, requiring no additional wiring connections to the telephone, and only costs about \$10 to build.


The "phone beeper" operates in a simple manner. The miniature speaker output of the "beeper" is placed near the telephone mouthpiece; the "beep" is therefore carried to the other end of the line with normal conversational volume. At the same time the "beep" is coupled through the

Construction Project

telephone beeper



THE AUTHOR'S COMPLETED "PHONE BEEPER" This simple device could save you from a lot of legal headaches. The "beep" sound is emitted by the speaker (behind the aluminum grill) at 15 second intervals. The unit, completely portable, is held in place by a wire loop and foam cushion. The whole project can be built in one easy evening for less than \$10.

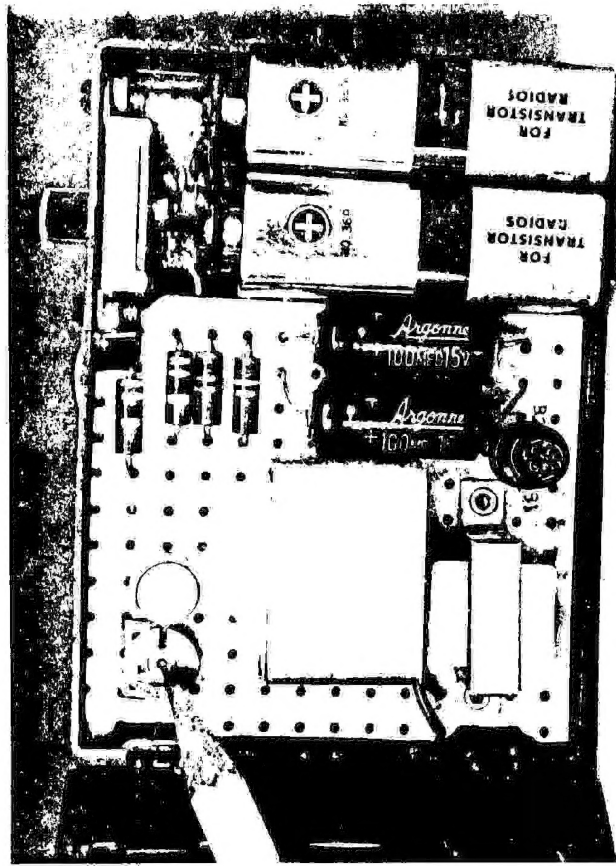

The parts layout is not critical, the author's unit was assembled in a plastic box. A sub-miniature pot allows feedback adjustment for oscillation of transistor Q1.

telephone sidetone generator, to the batteries in series. When the switch is closed the two large value capacitors (C1 and C2) are charged through time-constant resistor R1. When the voltage at the emitter of Q1 reaches a critical value, C1 and C2 discharge through the emitter-base junction of Q1, thus providing conductive bias for oscillator transistor Q2. Feedback for oscillation is obtained through the center tapped transformer, which also couples the oscillator to the speaker. Variable resistor R2 controls the oscillation frequency. Q2 may be just about any inexpensive PNP transistor, with the adjustment of R2 compensating for differences between specific transistors. The time interval is controlled by the relationship between C1, C2 and R1 in conjunction with Q1; increase the resistance of R1 if the interval is too short, decrease if too long. If "chirp" is evident, readjust R2.

Figure 1 shows how the "phone beeper" is used. Notice that it is entirely independent physically and electrically from the recording pick-up at the earpiece. A self-contained unit, the "phone beeper" contains a timing circuit, oscillator and speaker, and uses two common 9 volt transistor radio batteries for power. Built into a small box which may be held to the mouthpiece with a retaining clip made from piano wire, it does not interfere with normal telephone operation.

Figure 2 shows the schematic, and the simple circuitry used to time the "beeps". Q1 is a unijunction transistor (UJT), which is energized by the two 9 volt

(Continued on Page 18)

CENTRAL OFFICE OPERATIONS :

part two no.5 crossbar

by DAVID AUTOVON

The step-by-step switching office (see TEL April '75) serves its purpose well for small closely knit groups where automatic calling is used only over short distances or for calls within one central exchange. With the advent of Direct Distance Dialing, however, equipment became more complex. At the same time, the need to switch more calls faster, without extreme expense became more apparent. It was for this purpose that Crossbar Switching was developed. There are a number of different types of crossbar switching systems. The basic crossbar systems are: No. 5 crossbar, No. 1 crossbar, and 4A or Tandem crossbar. The type in most common use today is the No. 5 crossbar system, commonly referred to as crossbar 5. It is this version of crossbar that will be discussed in this article.

The crossbar systems get their name from the basic crossbar switch. This is an electro-mechanical inductively operated device. It is composed of bars, called *tickler rods*, running its length, both vertically and horizontally. These are called *verticals* and *horizontal*s for short. Each rod rotates approximately 45 degrees when operated by a relay coil at its end. Each tickler rod is equipped with many protrusions, called *ticklers*, which push against contacts when the rod is rotated. When one vertical and one horizontal are operated, a pathway for connections is established at the point where the two rods intersect. The ability to form electrical connections in this manner forms the basis of the crossbar system. There are two sizes of crossbar 5 switches commonly used; 100 point and 200 point. The 100 point has ten verticals and the 200 point switch has 20 verticals. Each type has ten horizontal. The size of switch needed in a particular exchange is determined by the traffic volume of that exchange.

In the crossbar system equipment falls into two major categories, *common control equipment*, and *talking path equipment*. Common control systems employ a *one at a time* method of operation. To better understand what is meant by "one at a time", consider the example of the basic single position operator controlled manual switchboard. At such a board the operator shares her time and attention over a number of calls. First she finds the calling line (indicated by a flashing light or other signal). She next determines the number to be called (usually verbally), and finally connects the two parties. After this process is completed the operator then leaves the call or "drops off the line". The operator can set up only one call at a time; when that call is completed she can go on to make another connection. Common control equipment is similarly used in the process of making the call, and also "drops off the line" after completing a connection. Equipment classified as common control includes: (1) the *originating register*, (2) the *marker*, (3) the *sender*, (4) the *incoming register*, and (5) the *number group*.

The other category of crossbar equipment, *talking path equipment*, includes the *switching frames*, the *line link frame*, and the *paths (trunks)* through which the talking circuits are established.

In the central office, each incoming telephone line is connected to a structure called the *main distributing frame* or *main frame*. As in step-by-step offices, the cables from subscribers' telephones enter the building through a cable vault. The cables are then brought up to meeting point, from which the individual wires radiate. This meeting point is the main frame. The two wires from each subscriber are called a *pair*, and terminate on the vertical side of the main frame. Wires coming from the crossbar office equipment are terminated on the horizontal side. These wires connect the

(Continued on Page 149)

European Report

battle with the phone phreaks "hots up"

(The following is reprinted from *New Scientist*, 3 April 1975.)

A new offensive against "phone phreaking" may have claimed its first victim last month. An alleged phone phreak had dialed a motoring organisation after a breakdown in central London, reportedly using a "lucky number" to save the charge he didn't have. But, in mid call, his line was abruptly crossed by the Post Office's special phone phreak detectives. (In Britain, as in most other countries, the telephone system is owned by the state and run by the Post Office.)

The lucky number is a code which, dialed in front of a normal call will block the charging pulses from reaching the phone or the phone bill! Interestingly, this particular code had been rigged up inside the Post Office's private London telephone system, which interconnects its numerous large London offices. But, outsiders could use this fiddle by dialing 432, the access code to Post Office headquarters, followed by the "lucky digits", 967; and then dialing the normal number, free of charge.

But the luck of the number ran out that day—for unknown to the phreaker, opposite the City [of London] callbox he used was a Post Office building. And, as he called through, the PO detectives were listening in—just 100 yards away.

This is not the first such fiddle in locations where only the internal staff could be responsible. Two years ago, the [London] Sunday Times (January 21, 1973, p 1)

reported a "Free-phone racket inside the Post Office" and alleged that up to 75 exchanges had been deliberately tampered with. One code which may have been included was very similar to the unlucky London number, using 977 rather than 967. Both these codes worked by using a unique loop-around circuit which by-passes checks in the equipment. Both must be wired by changing normal connections. Although that lucky number disappeared soon after the newspaper report, it reportedly surfaced last Autumn in its new form. The London telephone area has reputedly now been well immunised against the phreaks, since a large trial was staged by the PO in 1973 (see "Are Telephones Addictive?" *New Scientist*, vol 60, p 756-760). Startlingly, it is suggested that this fiddle is a new tactic by the PO detectives, who are said to have set it up themselves. One PO engineer who works on this private network is convinced that it was established as "trap". His view is reinforced by a similar event at another black-listed free-phone exchange—Edinburgh.

There, a useful trunk circuit on code 514 which gave unrestricted access to the International Telephone System mysteriously reappeared after an absence of two years. Far from joyfully greeting an old friend, the wary phreaks probed the circuit and found that only one line had been connected up. They suspected that it might also be connected to an inquisitive Post Office ear. It is plausible that the new London fiddle may have been rigged in this way. □

BIG MOTHER IS **'ma bell' has her ear**

by J. LOUIS

The Bell Telephone System monitored in random fashion millions of long-distance calls originating in six U.S. cities and secretly tape-recorded parts of at least 1,500,000 calls for analysis in New York.

The highly secretive program was designed to help combat electronic toll call frauds.

A spokesman for the American Telephone and Telegraph Co. says he doesn't think the company did anything illegal by eavesdropping on a reported 1.5 million long-distance calls between 1965 and 1970 in an effort to stop cheaters.

"We believe what we did was necessary to protect the integrity of our network and to keep people from cheating," said William Mullane about the voice recording program which recently came to light.

Mullane explained the company had been plagued by persons using an electronic blue box that bypassed AT&T billing systems and cut directly into the switching equipment, thereby completing free calls.

He would not elaborate on how the box worked.

Mullane did say that during the five year period only about 500 fraudulent calls had been discovered.

"I don't think we did anything illegal," Mullane said, explaining that the policy of intercepting pay-dodging calls has "been upheld in the courts. Such calls are illegal and since calls are our only property we have the right to intercept them."



WATCHING **to the wall**

of the program by sophisticated equipment that scanned trunk-line calls. The equipment looked for electrical indications that an attempt was being made to bypass the system's toll charge mechanism.

Of the more than 1 1/2 million long-distance calls that were at least partly recorded during the first four years of the program, with the tapes being sent to New York for analysis, fewer than 25,000 were considered by those doing the analysis to be indicative of fraud.

Of these 25 thousand calls, only about 500, or .016%, were confirmed as fraudulent.

Initially, the program went into effect in late 1964 with six units, each capable of monitoring 100 trunk lines. Each unit could handle about five calls at any given moment. The program began with two units each in New York and Los Angeles and single units in Miami and Detroit. Early in 1967 the Detroit unit was transferred to St. Louis, remaining there until the spring of 1970, and the supposed end of the program.

Several factors, including fear of public exposure, figured in the decision to end the program. Other factors included concern over the condition of the monitoring units and whether the whole approach was effective and comprehensive enough.

The monitoring units used during the program were designed by Bell Laboratories to detect electronic toll cheaters, particularly those persons who utilized "blue boxes" and so-called "mutes".

(A blue box is, of course, a device intended to allow the user to place long-distance calls for free, or at greatly reduced rates. It can also access various pieces of specialized telephone equipment not intended for subscriber use. The mute is a device which enables a phone subscriber to answer long-distance calls with no charge to the caller. This device is par-

A repairman for the Bell Telephone System has brought suit against the company in Houston, Texas, charging that his constitutional rights were violated when the company sought to search his home without a search warrant for unauthorized telephone extensions.

The pending case raises large questions of public policy both for the Bell System and its customers.

At stake for "Ma" Bell and her many AT&T subsidiaries is the fate of a two year old "Tariff Enforcement Program" which, through electronic monitoring mostly at night, uncovered 155,000 unauthorized extension phones in 1974 alone. Bell System officials estimate their losses in connection fees and billing rates at close to \$3 million for that number of phones.

Moreover, the sale of non-Bell phones and other unauthorized non-Bell-built equipment easily installable without company knowledge is a becoming a mushrooming business.

For customers, the case could uphold the right of any citizen to be free from the threat of a house search by the phone company without a warrant.

Bell spokespersons insist they never enter homes without permission although they claim the right to inspect their own equipment "within reasonable hours and with reasonable notice."

This interpretation is based on a decision made six years ago by the FCC which held that phone users do not have to consult the phone company--nor pay for--devices they install themselves which do not require wiring. Presumably, therefore, anything involving electrical connections is illegal.



ticularly upsetting to Bell, since it can be built in a matter of minutes, with as little as one resistor and two pieces of wire.)

(Continued on Page 17)

LETTERS

Dear Sirs:

I would just like to mention that I think you made some typos that may cause some misunderstandings. On page 12 of TEL, March '75, you have listed several overseas senders wrong. I think the list should read:

Jacksonville 185
Oakland 186
Denver 187

Pittsburgh, which you omitted, should be 184.

Otherwise, a good issue, hope you catch up soon.

A. Mills
B.C., Canada
(A. Mills is right, we weren't, ED)

Dear TEL People,

On page 11 of the March issue, second column, about the middle, dial pulses are described. "Each interruption causes a capacitor to build up a small charge..." I am probably a little out of date on various dial central offices, but your description certainly doesn't fit any of the old ones, and I am really rather inclined to doubt that it fits any other dial system. Someone is rather mistaken about this, and I believe it is your author.

Sincerely,
W.W.D
Wichita, KS

(W.W.D. is of course right, it wasn't our month, ED)

In the article, "Touch-Tone— what it is, what it does" credit should have been given to David Talley and Hayden Book Company, of Rochelle Park NJ, for material used from "Basic Telephone Switching Systems", a Hayden publication.

Tel thanks Hayden books for permission to use their material, and recommends their books on the the field of telephony highly.

The April 1975 issue should have been labeled Volume 2, Number 4.

Page 11

COMING NEXT MONTH



OVERSEAS DIALING: SYSTEM 4

TOLL FRAUD DETECTION DEVICES

CONSTRUCTION PROJECT: TELEPHONE JOKELINE

A LETTER TO OUR READERS

Since its inception almost a year ago, TEL has been providing a service not available anywhere else. Advertised as "bringing you the secrets of your phone" TEL has tried hard to print a magazine that fills the needs of all people who have an interest in their phone and the system behind it.

As has been pointed out (TEL March '75) we didn't expect the large response to our new magazine. That initial rush simply caught us off guard. As a result we began to fall behind in production. The March issue didn't appear until late May. It was in May, however, that we moved to larger quarters and added three people to our staff in an effort to catch up.

Within two weeks after mailing the March issue we had finished the rough lay out and were ready to set the April issue. It was then that we were struck an awful blow.

After working till 2 A.M., Jack Kranyak, our Publishing Director and the brains behind TEL, was on his way home, a trip he has yet to complete. Only five blocks from our office he was involved in a serious auto accident. He lay unconscious for six weeks with severe head injuries.

Fortunately, Jack was strong and has made good progress toward recovery since regaining consciousness. He is, however, still in the hospital.

Jack's accident forced some unexpected changes on us. Two people had to be found and trained to take over the functions that Jack did by himself. Even with the extra help it still took a while to learn in a few weeks what Jack had taken years to put together.

We are now, once again, on top of it, our staff works smoothly and we expect Jack back this fall. We hope we have your understanding and your patience as we work to catch up.

In order to keep all subscriptions in order we decided not to skip months, that is why you are receiving this May issue in September. This is not a old issue! We hope that at our current pace we will be "on time" by Christmas.

Those who wish may write Jack Kranyak c/o Northridge Hospital, 18300 Roscoe Blvd., Northridge CA 91324, Room 102.

Thank you for supporting us to this point.

Sincerely,
John Reynolds

Dear Sirs,

For your info: Several step-by-step exchanges in Alabama have a good assortment of control functions and test numbers accessed by 86XX. Examples: In Birmingham 866 breaks the loop loose from the line finder and shorts the CO end for approx. 2 min. I assume this is to allow loop resistance measurements from the customer premises.

865 gives a second dial tone, when more digits are dialed the dial tone is broken and the equipment seems to be accepting the digits, but you never seem to get anywhere. 781195 is a 1KHz test tone with battery reverse every ten seconds.

The entire 681 exchange will accept Touch-Tone whether you pay extra for it or not! Odd things happen when you address this exchange from 550-XXXX.

Hope you find all this interesting,
R.C.
Birmingham, AL

Dear Phreaks,

Rochester, NY has an independent telephone company which is as bad as Ma Bell. The service is inferior even compared with other independents around the nation.

Anyway here are some codes that I have learned:

Dial 511, and a computer will read back the number you are talking from, followed by a tone.

997-XXXX gets a 1KHz tone, and if someone else in the system dials 998-XXXX the two parties will be connected. I have asked several phone company employees about this and none know what it is for.

The ring back numbers are, 981, 982 or 983 plus the last four digits of your telephone number. In Buffalo the numbers are 571, 572 or 573, I think they work the same way.

Looking forward to the next issue,
AS
Rochester, NY

May 1975

Telephone Electronics Line

Page 12


poor phone

(Continued from Page 4)

(A note of caution, while phone lines are generally not dangerous to handle, they can conduct very high voltages during the ring cycle. To avoid the possibility of severe electrical shock, remove a phone from the hook to "busy out" your line and prevent ringing.)

This is about the simplest phone that one can build. However, I think that even a "poor man" would like a little more sophistication in his telephone. It would, for instance, be convenient to be able to "hang up" your phone. In order to do this, install a single-pole single-throw (SPST) switch between the yellow and red wires. While you are doing this, it would be a good idea to install a 1K ohm resistor (see diagram 2) in series with the switch. This will give you a louder dial tone. (Smaller value resistors are fine, but any greater value stops the dial tone.)


diagram 2

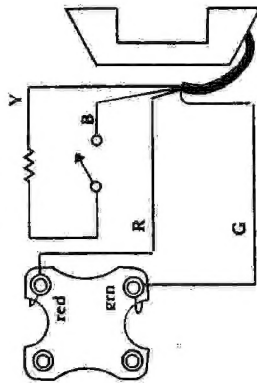

Now you can hang up and answer your phone using the switch. (By the way most early telephones had a similar switch instead of today's cradle switch.) After getting a dial tone, flick the switch on and off very quickly once. That will "dial" you a one, twice a two, etc. You should flick the switch at the rate of about ten times per second. It may sound hard at first, but practice makes perfect. Try information for starters, and work your way up to "O" operator. It is best to pause a second between digits in a number.

If you wish to know when the phone is ringing, place a 100K ohm resistor in series with a NE2 neon lamp across the telephone line (see diagram 3). The lamp will light when your phone rings.


diagram 3



In order to make dialing a little easier, you might wish to substitute a push button switch (momentary contact, normally closed contacts) for the SPST switch. In that case, in order to "hang up" the phone, I would advise a double-pole double-throw (DPDT) switch connected to both sides of the line. To protect your phone from the possibilities of being "fried" by ring voltage it would be a good idea to connect a 1 mfd 150 volt electrolytic capacitor across the line (see diagram 4).

You can mount your finished "Poor Person's Phone" in a cigar box or similar container, or even place the whole thing in a glob of liquid plastic. To make the phone easier to use, you can add a "store bought" dial, and perhaps a simple speaker type jack and plug to make your new phone portable.

diagram 4

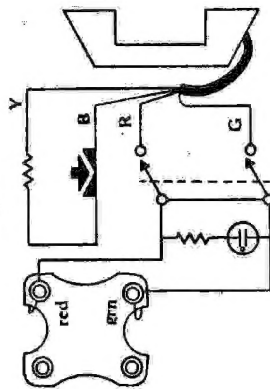

(Another Editor's Note: We would like to see photographs of your own "Poor Person's Phone" and hear about any modifications you may have added. The best ones we receive will be published in an upcoming issue of TEL.) □

A LITTLE LEXICON

(A Continuing Feature from TEL)

Blocking: The inability to interconnect two idle terminals in the switching network because one or more of the connecting links are in use for another call.

Enable pulse: Any current or voltage pulse that enables a circuit to become operative.

Interoffice trunk: Communications channel between two separate central offices.

Intraoffice trunk: Communications channel used to connect two subscribers lines in the same central office.

Loop: The two-wire circuit formed by the subscriber's telephone set, his cable pair and other conductors that connect it to the central office equipment.

Off hook: The condition that indicates a "closed" loop or the active state of a subscriber's line. This indicates that the phone is in use and has "closed" a loop with the central office.

On hook: The condition that indicates the idle state or "open" loop of a subscriber's line. Indicating that the phone is available to receive calls, an "open" loop exists between the subscriber's phone and the central office.

Talking path: The transmission path of a telephone circuit making up the tip and ring conductors, and the equipment connected to them.

Testboard: Equipment in central office used for access to subscriber lines to aid in line testing and diagnosing service breakdowns. □


NOW

TAPE PHONE CALLS LEGALLY!*

with PHONE-CHEK

Automatically Tape Records
All Phone Conversations

- FOR HOME AND OFFICE
- RECORDS ALL CONVERSATIONS FROM ANY EXTENSION
- RECORDS ANSWERING SERVICE PICKUPS
- WARNING LABELS DETE UN-AUTHORIZED OUTGOING CALLS

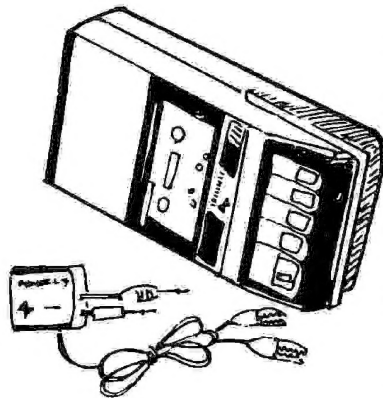

- + Up to 12 Hours Recording Time With The Deluxe Model
- + AC/DC Operation
- + Includes All Necessary Connectors!
- + Uses Standard Cassette Tapes

For more information write to:

C. P. SECURITY SERVICE, INC.
16860 South Park Avenue
Suite 101
Tinley Park, Illinois 60477




AMERICAN EXPRESS

AND OTHER CARDS ACCEPTED

* Federal law requires the consent of only one party to a phone recording. Check state and local regulations.

NOW AVAILABLE
for the Telephone
Experimenter!



**COMPLETE
CONSTRUCTION PLANS**

BASIC CONSTRUCTION PLANS: \$3.00 each

AUTOMATIC DIALER

Automatically dials numbers stored in its magnetic memory. Works with Touch-Tone and Rotary Dial, and stores hundreds of numbers.

"BLACK BOX"

Device used by law enforcement agencies to monitor telephone conversations. Hard to detect.

CALL LIMITER

Stop uncontrolled long-distance calls made from your phone. Device disconnects all long-distance calls before they can be completed. A \$ saver.

CENTRAL DIAL EXCHANGE

Set up your own telephone exchange in your home, or throughout your whole neighborhood.

RECORDER-ACTUATOR

Automatically records all incoming and outgoing calls on your phone line. Very simple to build.

TELEPHONE SCHEMATICS

The basic schematics for most commonly used telephones, Bell, GTE, Stromberg-Carlson, etc.

TELELINK BURGLER ALARM

Use the telephone line as a link to notify you when a break-in occurs. Good babysitter too!

ELECTRONIC PLANS:

MULTIFREQUENCY ENCODER NETWORK

New IC version now available. Very simple to build, stable tones and good output volume.

\$5.00 each

BIOFEEDBACK CONDITIONER

Monitor the fluctuations that your brain produces and learn to put yourself in any mood desired. Completely safe to use.



SPECIAL PRICE! ALL OF OUR CONSTRUCTION PLANS only \$25.00

(Ask for the COMPLETE Package)

**TELETRONICS COMPANY of AMERICA, 19730 Ventura Blvd., Suite 3
Woodland Hills, California 91364**

TELE-NEWS

MAGNETIC HANDSETS

Engineers at Bell Labs have designed a new type of telephone handset to accommodate users of hearing aids which have a telephone pick-up feature. The new handset produces a harmless electromagnetic field that is necessary for operation of the hearing aid. This magnetic field was once present in all handsets but was eliminated in more modern designs. The new handset is distinguished by a blue rubber grommet on the cord where it enters the handset. It is currently being tested at C&P in Baltimore and at New York Telephone.


TELEPHONES FOR THE DEAF

On May 2, 1975 what is believed to be the first transatlantic telephone call between two deaf persons, took place. The call was placed by Jack Ashley from the London Trade Center and received in Washington DC by the director of Deafness and Communicative Disorders, Department of Health Education and Welfare. They communicated with teletypewriters over normal telephone lines.

CENTRALIZED WHAT?

General Telephone of California has begun field testing of centralized answering and recording equipment, offering an alternative to customer owned or customer premises devices. The equipment was developed by General's Automatic Electric Division. When the service is connected to a subscribers line the equipment automatically cuts in after a predetermined number of rings (adjustable from one to five). Features include answer and record, answer only, and variable announcement length. The customer uses his regular Touch-Tone buttons to control the unit for such functions as message record and playback. A special tone tells the customer that messages have been recorded. Remote access from any location is also provided through a special access number. □

DIAL-A-JOKE

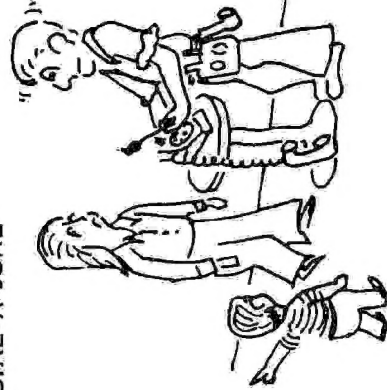

"Maybe it's the telephone Daddy put in the basement that's causing the trouble."

**sonic ranger
1000**

MONITORS LEVELS IN:

- STORAGE TANKS
- BINS
- SILOS
- CANALS
- RIVER BEDS
- BE-HIND DAMS

**An Expandable System With
Many Other Features**

**Unique Products Company
12867 Mac Neil, Sylmar CA 91342**

(Continued from Page 10)

But if the initial phase appeared to indicate, for example, that a blue box was being used, the equipment activated a master tape recorder that would record a segment of the entire content of the call. The master tape subsequently was sent to New York for analysis.


The spokesperson also pointed out that the Bell system will continue to crack down on electronic toll fraud, but that its present approach does not involve voice recordings. "We have found a better way to do it," he said in closing. □

DYCON 1000

The *DYCON 1000* can carry on four telephone conversations, at the same time! Waits up to ten seconds for a reply, then allows from 20 seconds to twenty minutes for each response.

WRITE:

THE INTERNATIONAL GROUP
7100 HAYVENHURST AVE., SUITE 104
VAN NUYS, CA 91406
(213) 988-6121

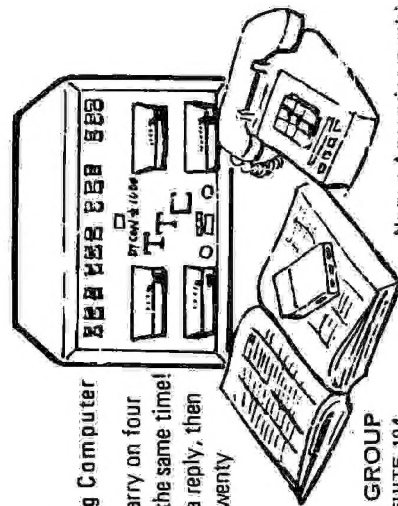

**Not an Answering machine:
A calling machine!**


NEW BELL BOOK

The revised copy of Notes on Distance Dialing, published in 1968, is to meet the requirements of the telecommunications industry for a single general information source on the basic operating principles of the network, AT&T said.

A T&T's Engineering and Network Services Department and Bell Labs prepared the revision with help from the USITA and the REA.

The 1975 edition can be purchased for \$12.50 a copy pre-paid from Western Electric Company, Commercial Relations, P.O. Box 1579 Newark NJ 07102.

beeper (Continued from Page 6.)

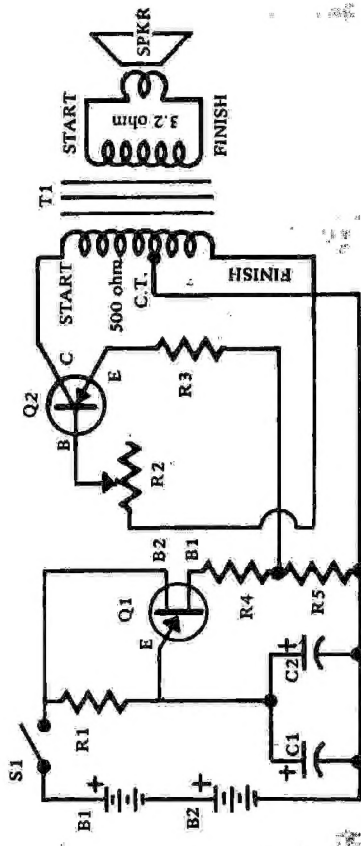

PHONE BEEPER PARTS LIST

- B1, B2—9-volt transistor radio battery
C1, C2—100 mfd 15 volt electrolytic capacitor
Q1—GE 2N1671 unijunction transistor
Q2—general purpose PNP germanium transistor
R1—82 K ohm $\frac{1}{2}$ watt resistor
R2—50 K ohm potentiometer
R3—33 ohm $\frac{1}{2}$ watt resistor
R4—100 ohm $\frac{1}{2}$ watt resistor
R5—27 ohm $\frac{1}{2}$ watt resistor
S1—SPST slide switch
T1—subminiature output transformer
SPKR— $1\frac{1}{2}$ " dia. speaker, 3.2 ohm
MISC: plastic box, battery clips

NOTES: (1) When S1 is turned on, first beep takes about 30 seconds. Thereafter 15 seconds. (2) Test with 10K resistor across R1 to increase beep rate. (3) Q2 will not oscillate unless T1 leads are connected as shown. If no oscillation (no beep) reverse leads and/or adjust R2.

Construction may be varied to suit the builder, and the wiring placement is not critical. The author used a perforated board with components on top and point-to-point wiring and jumpers underneath. A cutout in the board accommodates the speaker.

In use the first "beep" will take about 30 seconds after the unit is turned on. "Beeps" will follow regularly thereafter at approximately 15 second intervals. Current drain should be about 2½ milliamperes, so the batteries should last over 200 hours with normal use.

A simple retainer, fashioned from 1/16" diameter piano or coathanger wire, is formed to fit around the telephone mouthpiece. A piece of foam rubber may be cut TELEPHONE HANDSET.



TYPICAL "BEEPER" INSTALLATION

